

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization International Bureau



(43) International Publication Date
8 July 2004 (08.07.2004)


PCT

(10) International Publication Number
WO 2004/057052 A1

- | | | |
|--|----------------------------------|---|
| (51) International Patent Classification ⁷ : | C23C 14/26 | (72) Inventors; and |
| (21) International Application Number: | PCT/KR2003/002620 | (75) Inventors/Applicants (<i>for US only</i>): JEONG, Jae-In [KR/KR]; RM.108-1401, Daelimhansuptawn, Yugang-ri, Yeonil-eup, Pohang-shi, Kyongsangbuk-do 790-885 (KR). LIM, Tae-Gyo [KR/KR]; #913 Deunggun, Bangchon-ri, Sabong-myeon, Jinju-shi, Kyongsangnam-do 660-881 (KR). |
| (22) International Filing Date: | 1 December 2003 (01.12.2003) | |
| (25) Filing Language: | Korean | (74) Agent: HONG, Sung-Chul; #703, New Seoul Bldg., #828-8, Yeoksam-dong, Kangnam-gu, Seoul 135-080 (KR). |
| (26) Publication Language: | English | |
| (30) Priority Data: | | (81) Designated States (<i>national</i>): CN, DE, GB, JP, US. |
| 10-2002-0082792 | | |
| | 23 December 2002 (23.12.2002) KR | Published:
— with international search report |
| (71) Applicant (<i>for all designated States except US</i>): RESEARCH INSTITUTE OF INDUSTRIAL SCIENCE & TECHNOLOGY [KR/KR]; San #32, Hyoja-dong, Nam-gu, Pohang-shi, Kyongsangbuk-do 790-330 (KR). | | <i>For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.</i> |



(54) Title: RESISTANCE-HEATED BOAT AND MANUFACTURING METHOD THEREOF

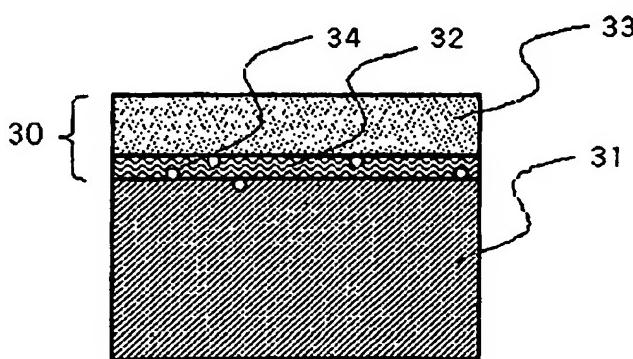

(57) Abstract: Disclosed herein are a resistance-heated boat and a manufacturing method thereof for use in vacuum vapor deposition of a metal evaporant onto a substrate in a resistance heating manner. The boat comprises a graphite block to be formed into a boat, and a protective barrier formed at the graphite surface for preventing the graphite layer from reacting with the metal evaporant. The protective barrier has an aluminum-rich layer, and a nitrogen containing compound layer. According to the present invention, it is possible to achieve stable and continuous evaporation of metals including aluminum.